



INSTALLATION INSTRUCTIONS

Accessory
REAR SEAT COVERS
 P/N 08P32-T2F-100

Application
2016 ACCORD
 4-DOOR

Publications No.
VERSION 1

Issue Date
AUG 2015

PARTS LIST

Left seat back cover



Right seat back cover



Left seat side bolster cover



Right seat side bolster cover



Armrest cover



Seat cushion cover






Illustration of the Rear Seat Covers in the Vehicle

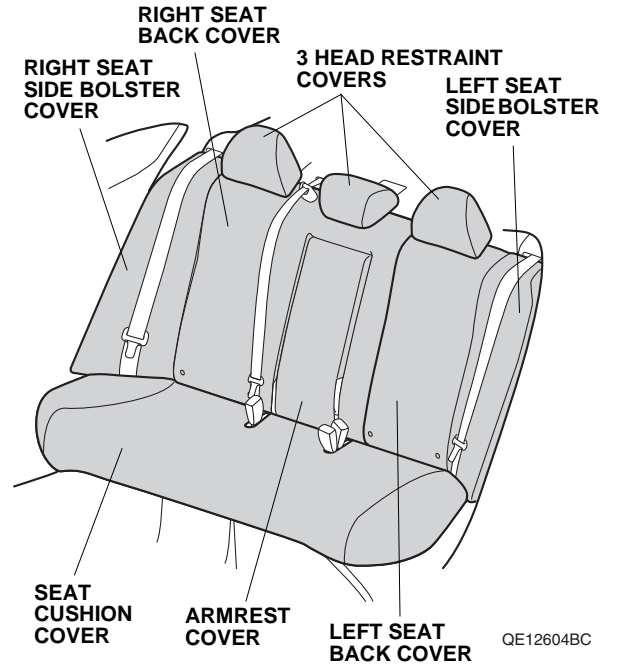

INSTALLATION

Installing the Head Restraint Covers


1. While pressing on each head restraint guide knob, remove the three head restraints by pulling them upward.

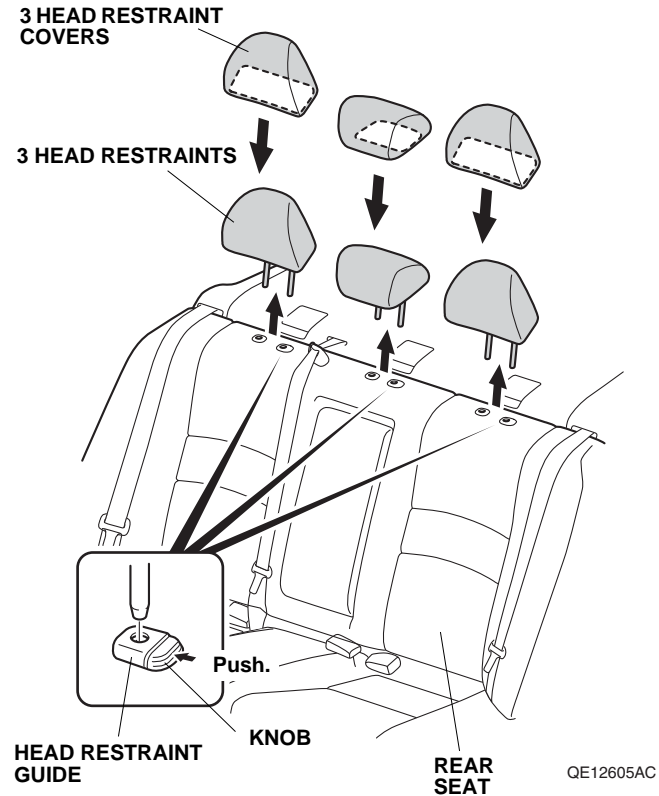


2. Fit the three head restraint covers over the head restraint.

Installing the Rear Seat Covers


3. Pull out the center seat belt from seat belt guide.

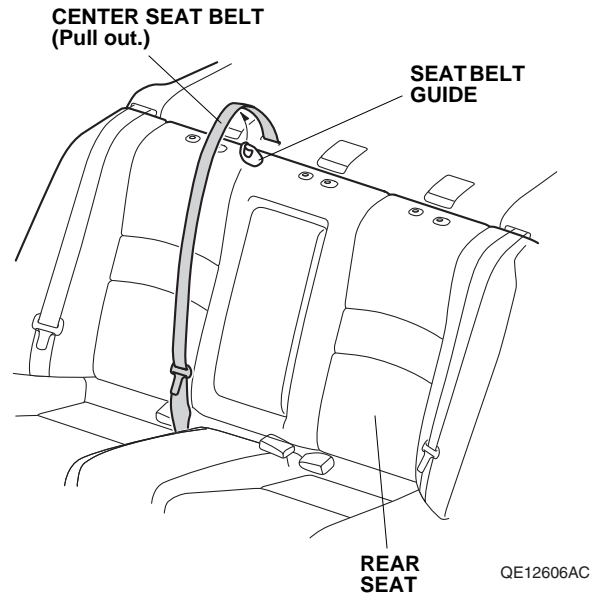


4. Open the trunk. Pull the levers, and fold the rear seat backs forward.

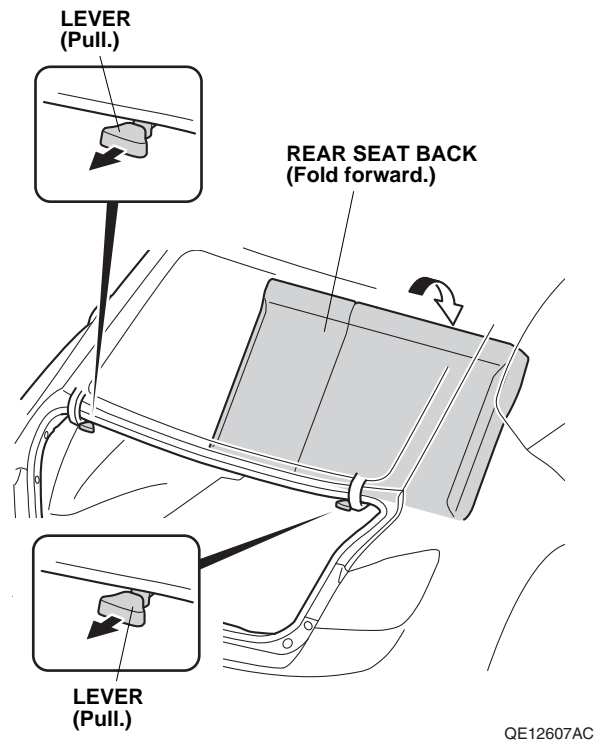


5. Fit the left seat side bolster cover onto the left seat side bolster through the seat belt. Insert the five tabs into the left seat side bolster.

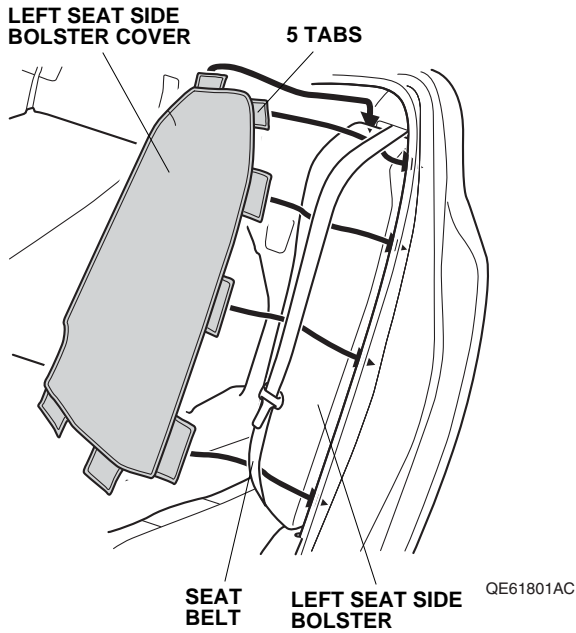

6. Secure the three fasteners to the left seat side bolster.

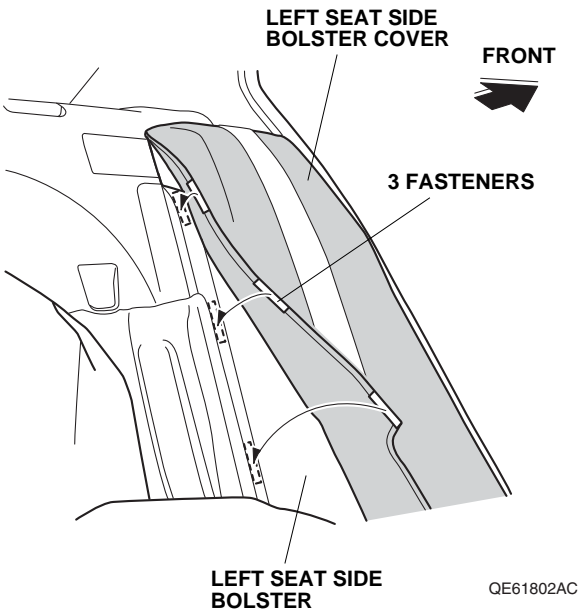


7. Insert the two tabs to the left seat side bolster.

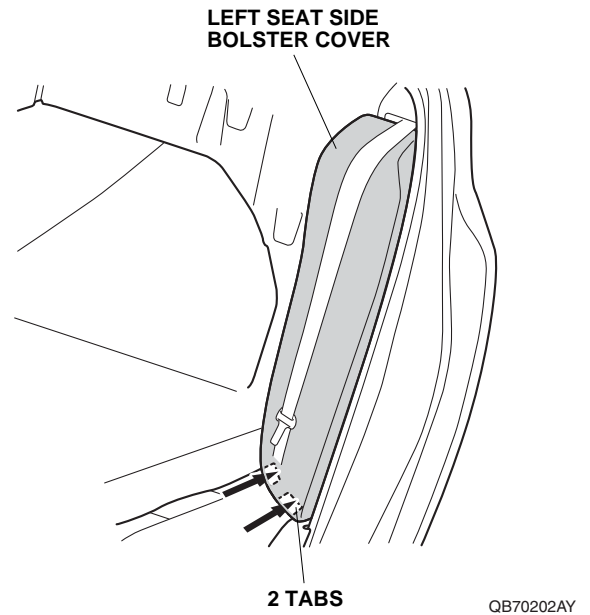


8. Repeat steps 5 through 7 to install the right seat side bolster cover.

9. While supporting the right rear seat back, fit the right seat back cover onto the right rear seat back.

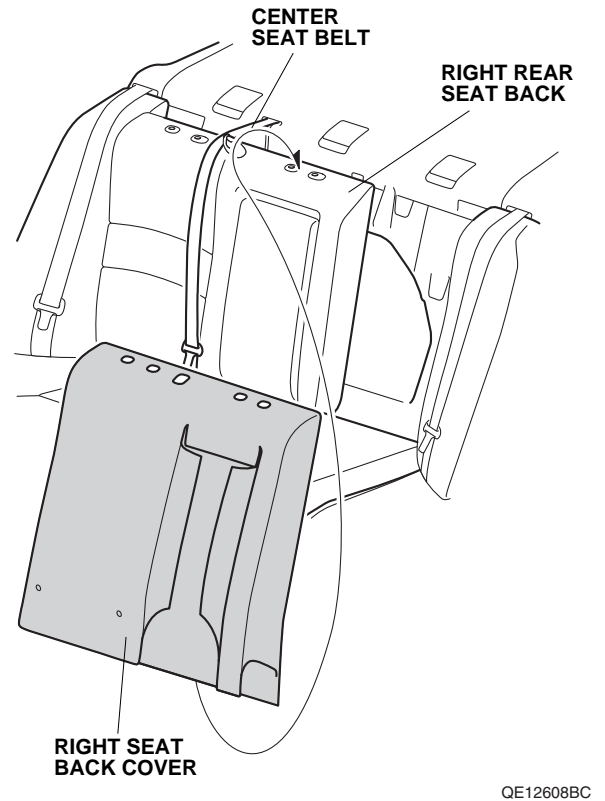


10. Secure the fastener on the right rear seat back. Raise the right rear seat back and lock it to its original position.

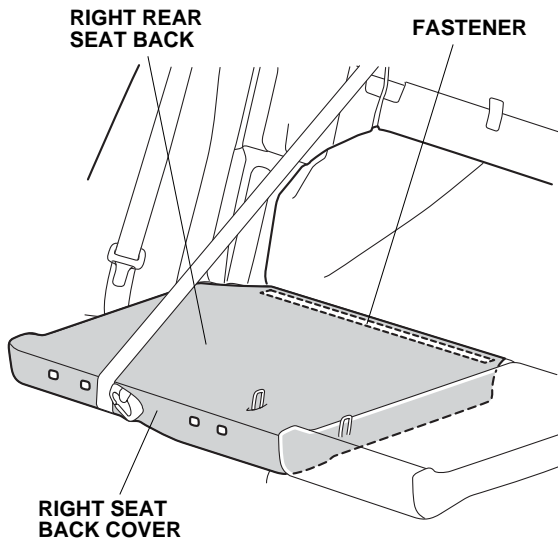


QE12609BC

12. Secure the fastener on the left rear seat back. Raise the left rear seat back and lock it to its original position.

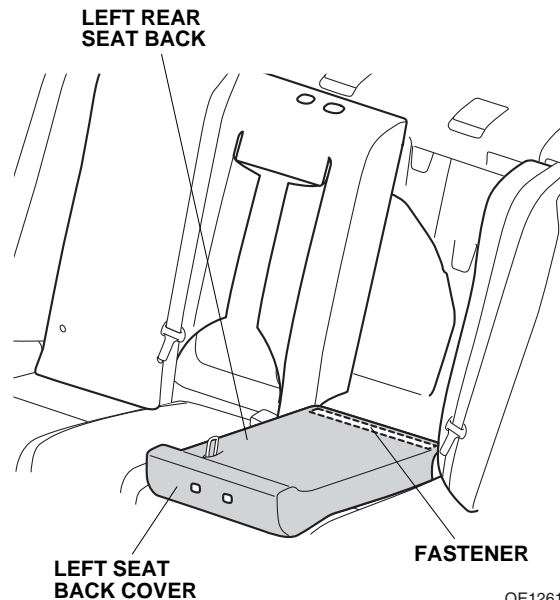


QE12611BC

11. While supporting the left rear seat back, fit the left seat back cover onto the left rear seat back.

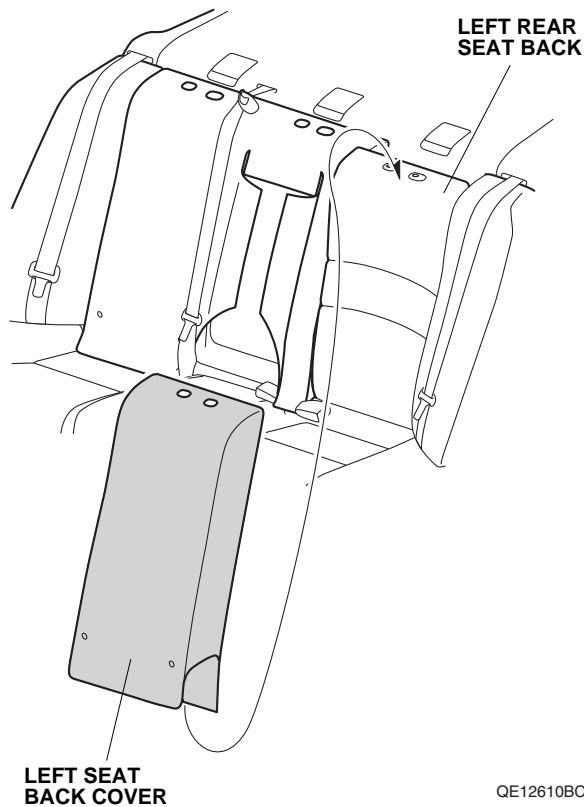


QE12610BC

13. Insert each seat back cover under the head restraint guides. Pull down the armrest, and secure the three fasteners on the right rear seat back.

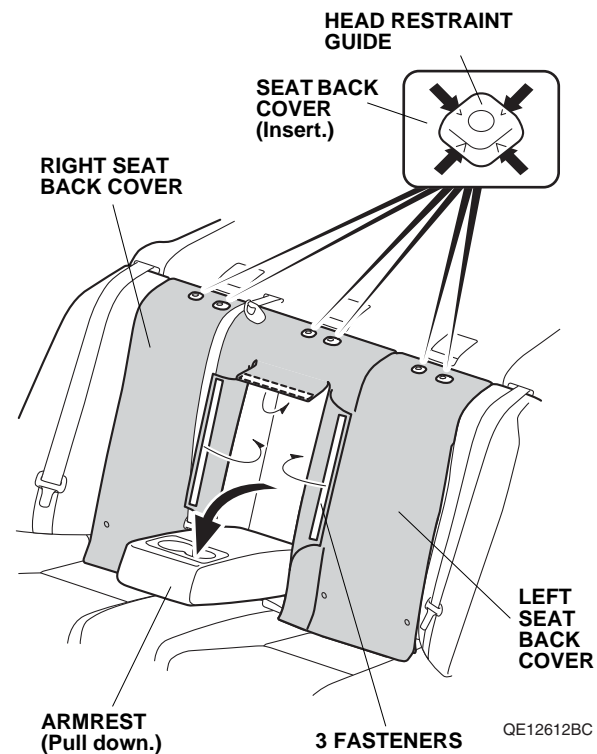


QE12612BC


14. Insert the seat back covers between the rear seat backs and the rear seat cushion, and secure the three fasteners to the rear seat backs.

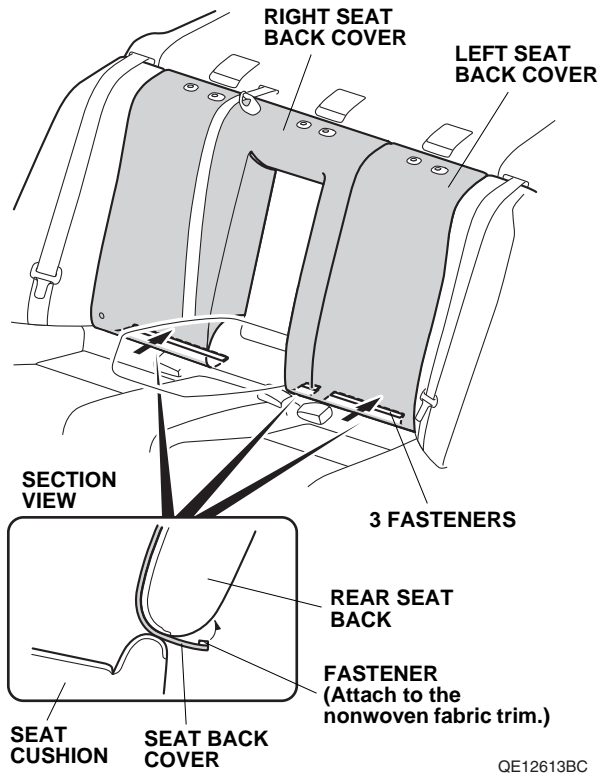


15. Install the armrest cover to the armrest.

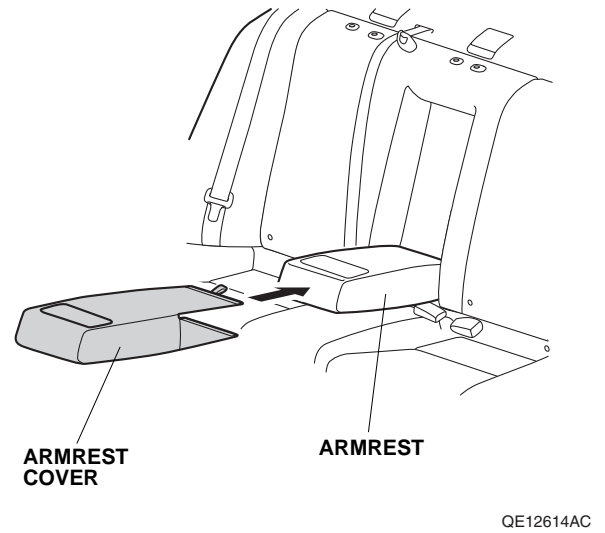


16. Raise the armrest. Pull out the armrest cover between the armrest and the right rear seat back, and secure the fasteners on the armrest cover as shown.

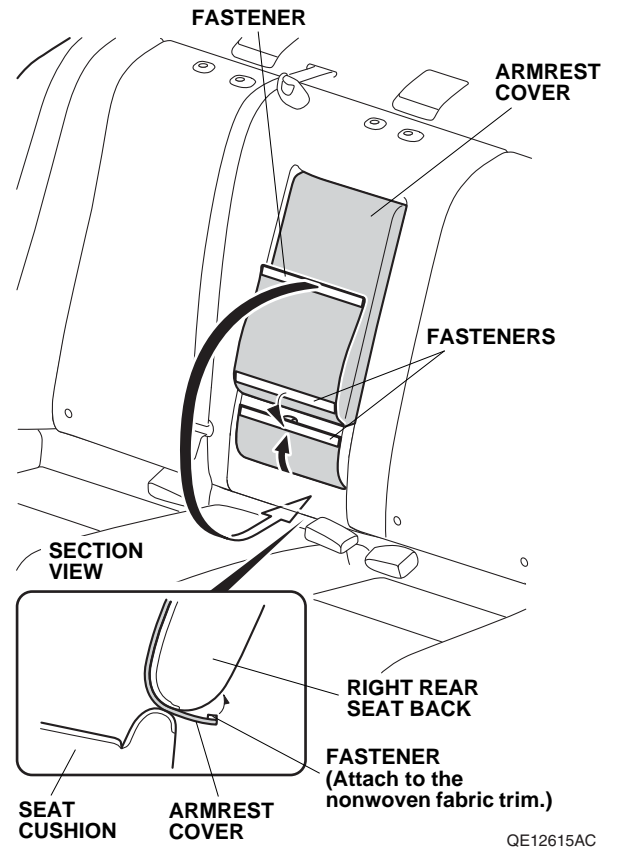

17. Insert the armrest cover between the right rear seat back and the rear seat cushion, secure the fastener to the right rear seat back.
18. Install the seat cushion cover to the rear seat cushion with the three fasteners. Insert the four tabs under the rear seat cushion.

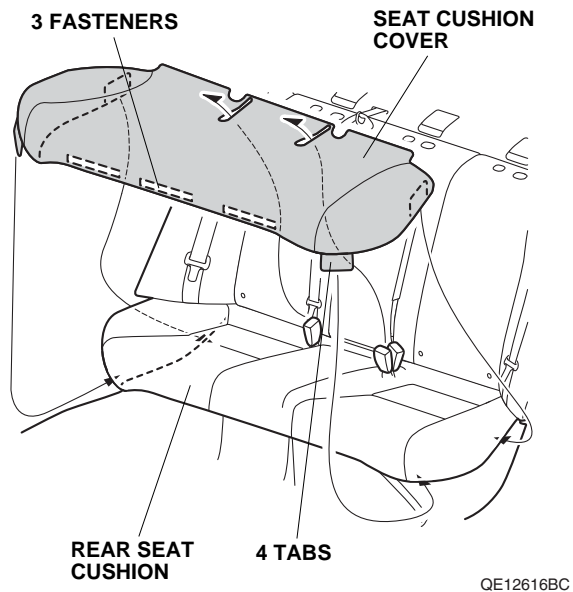

19. Insert the seat cushion cover between the rear seat back and the rear seat cushion, and secure the three fasteners to the rear seat cushion.

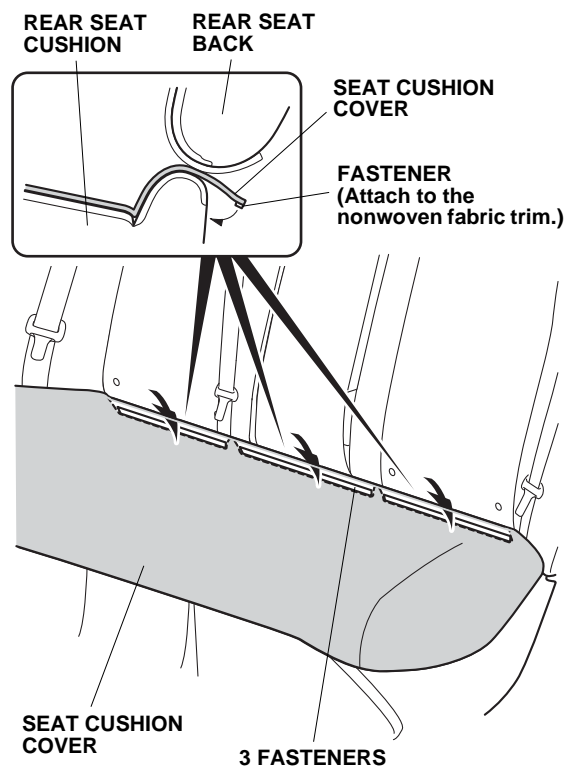

20. Secure the center seat belt to the seat belt guide.
21. Install the head restraints.