



## INSTALLATION INSTRUCTIONS

Accessory  
**CROSSBARS**  
 P/N 08L04-THR-100  
 P/N 08L04-THR-P00

Application  
**2025 ODYSSEY**  
**MODEL SERIES**

Publications No.  
**VERSION 1**  
 Issue Date  
**JUN 2024**

### PARTS LIST

Front crossbar (long)



Rear crossbar (short)



8 Bolts



### TOOLS AND SUPPLIES REQUIRED


- Ratchet
- Torque wrench
- T-30 TORX bit

### INSTALLATION


#### NOTE:

- The weight of the cargo must not exceed the maximum weight capacity of 165 lbs (75 kg).
- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the crossbars.


- Remove four plastic screws from the left roof rail and the right roof rail.

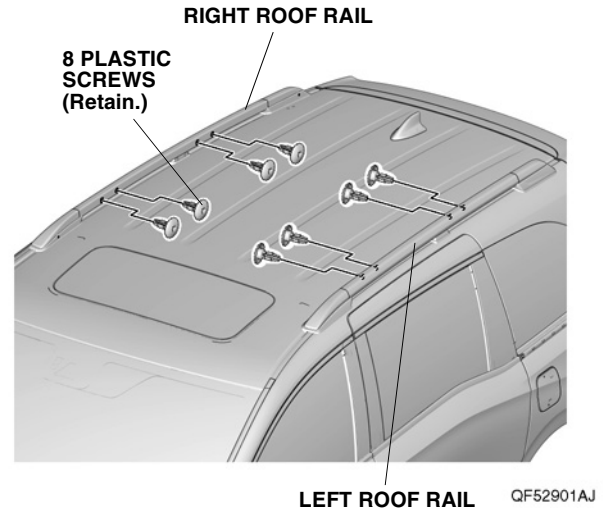

- Install the front crossbar with four bolts. Torque the bolts to 7.4 lb-ft (10 N-m).

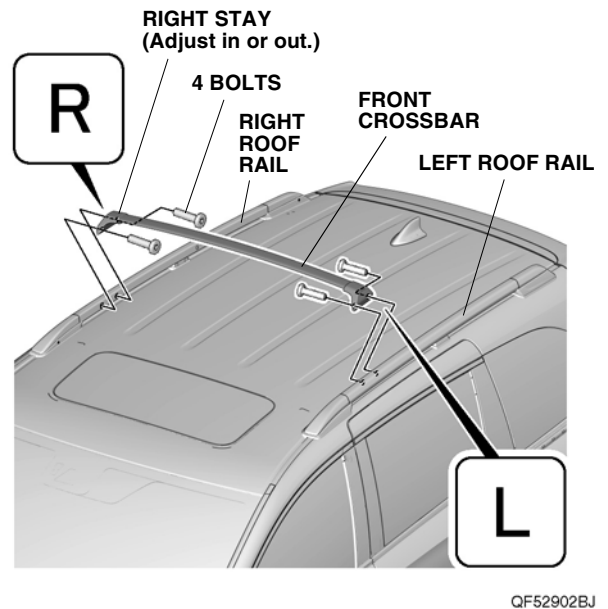

3. Install the rear crossbar with four bolts. Torque the bolts to 7.4 lb-ft (10 N·m).

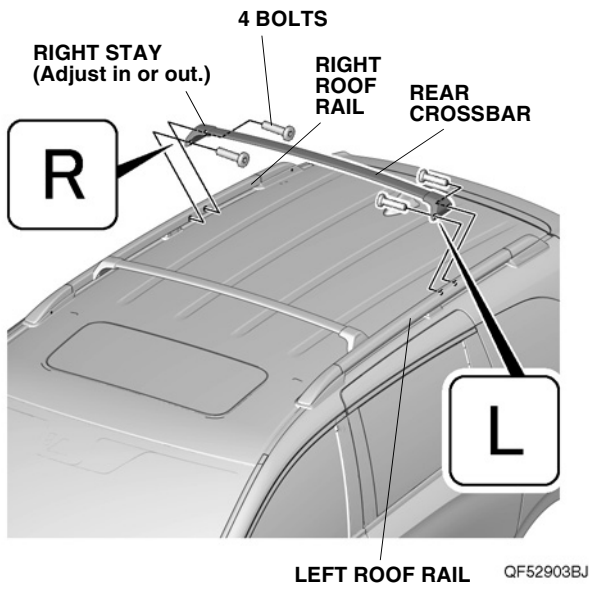

Give a copy of this page to your customer.

## **CROSSBARS**

### **USE AND CARE**

- Check the roof rail mounting bolts frequently, and retighten if necessary. Torque the bolts to 7.4 lb-ft (10 N·m).
- Distribute the weight of the cargo evenly, and do not exceed the maximum weight capacity of 165 lbs (75 kg).